


HP-1050

TRIPLEX POWER PUMP

H Y D R O P L E X

The Heart of Your System

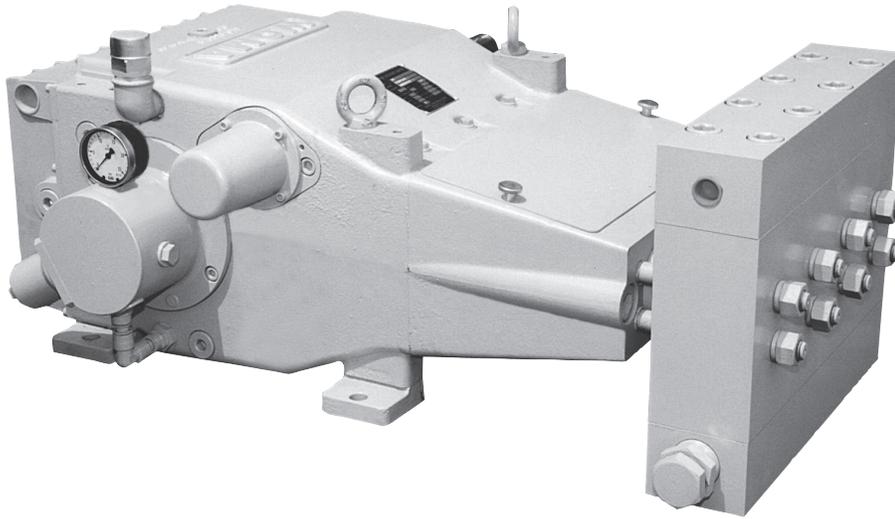

FEATURES

- Pressure to 20,000 psi *
- Continuous Duty Operation
- Internal Helical Gear Reduction
- Durable and Compact
- Quiet Running
- Pressurized Lubrication System
- Easy Field Maintenance
- High Output Efficiency
- High Quality Materials and Workmanship
- Corrosion Resistant Hardware

APPLICATIONS

- Hydrostatic Testing
- Chemical Injection
- Methanol Injection
- Downhole Equalization


MORE

- Maximum Continuous Power 200 HP
- Maximum Intermittent Power 250 HP
- Internal Gear Ratio 4.52:1 (other ratios available)
- Maximum Continuous Input RPM 1800 RPM
- Maximum Intermittent Input RPM 2150 RPM
- 3.75" Stroke Length

Plunger Dia.	Maximum Pressure PSI	Gallons Per Input Revolution	Volumes							
			2100 RPM		2000 RPM		1800 RPM		100 RPM	
			GPM	BPD	GPM	BPD	GPM	BPD	GPM	BPD
3/4"	20,000 *	.0047	10.00	343	9.52	326	8.57	294	.48	16.32
7/8"	20,000 *	.0065	13.61	466	12.96	444	11.66	400	.65	22.21
1"	20,000 *	.0085	17.77	609	16.92	580	15.23	522	.85	29.01
1-1/8"	15,750	.0107	22.49	771	21.42	734	19.28	661	1.07	36.72
1-3/16"	14,000	.0119	25.00	857	23.80	816	21.42	734	1.19	40.80
1-1/4"	12,500	.0132	27.77	952	26.44	907	23.80	816	1.32	45.33
1-3/8"	10,500	.0160	33.60	1,152	32.00	1,097	28.80	987	1.60	54.85
1-1/2"	9,000	.0190	39.98	1,371	38.08	1,305	34.27	1,175	1.90	65.28

Above flowrates based upon 100% volumetric efficiency
 *Please consult with factory for pressures over 20,000 psi



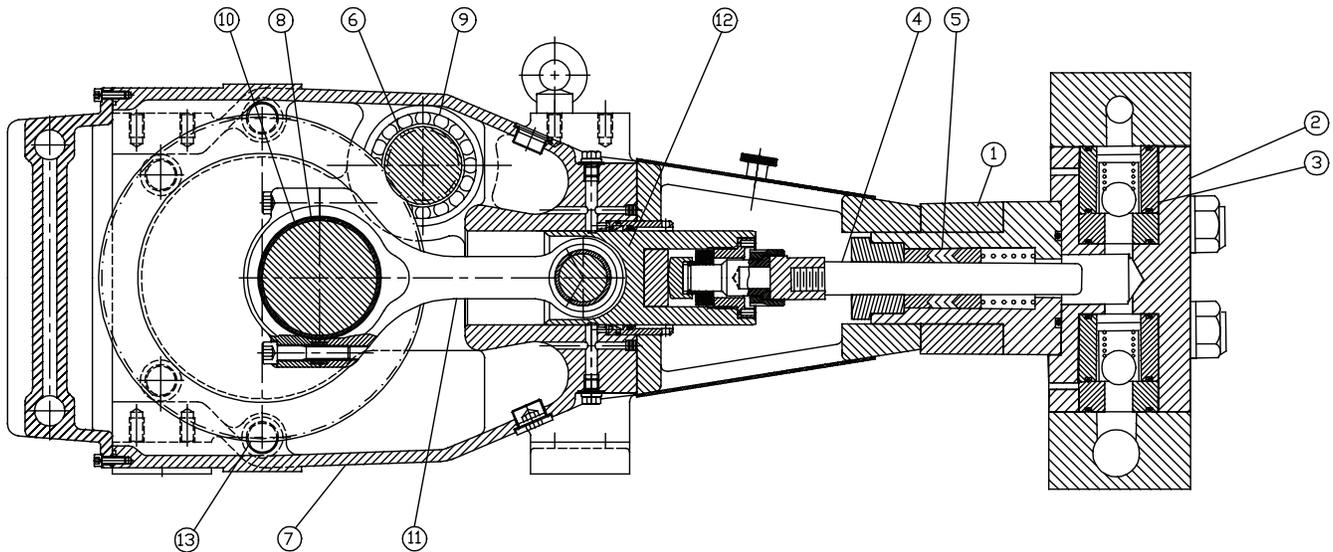

Fluid End

- 1. Split Cylinder** The packing cylinder is designed for easy accessibility to all replacement wear parts. Packing and plunger changes require minimal down time.
- 2. Fluid Cylinder Body** Machined from high quality solid block alloy and stainless steel, ground to precision for maximum pump performance.
- 3. Discharge and Suction Valve Assemblies** Each valve assembly is interchangeable and made from precision machine ground, hardened 17-4 PH stainless steel. No wing guide or threads are required - reducing field maintenance and increasing pump efficiencies. The Hydroplex ball valve is rated to 30,000 psi and features a hardened stainless steel seat. Balls are highly polished, ground and hardened stainless steel. All o-ring seals are flat surface designed, which reduces o-ring cutting and provides maximum pressure sealing.
- 4. Power Plungers** The power plunger is heat treated stainless steel, ground and polished to an 8 rms surface finish with 60 Rockwell C hardness.
- 5. Plunger Packing** Multiple element Chevron style packing is used and is self adjusting, requiring minimal field maintenance. Packing lubrication and plunger cooling ports are provided for external water or oil lubrication.

Power Body

6. Direct Drive Quiet running pinion and main gears are helical cut and machined from high strength alloy steel. The internal gear reduction allows for direct drive coupling to most power sources.

7. Crankcase Oilfield rugged cast iron case protects internal components and the upper half of the case is easily removed for inspection and service.

8. Automotive Type Crankshaft Forged from alloy steel and balanced for continuous duty operations.

9. Shaft Bearings Precision conical tapered roller bearings support each shaft end.

10. Crankshaft Journal Bearings Journal bearings are high quality automotive type with steel-backed inserts.

11. Connecting Links Links are cast iron with replaceable wrist-pin bearings.


12. Crossheads Heavy duty ductile iron crossheads eliminate side loads on power plungers. Crossheads feature a “floating” plunger adapter for self-aligning the plungers.

13. Pressure Lubrication System Oil in the crankcase is picked up by positive displacement lube oil pump and delivered to all moving parts. Crankshaft and connecting rods are rifle drilled for oil distribution.*

*Optional auxiliary lube available for low speed operation.

HP-1050

TRIPLEX POWER PUMP

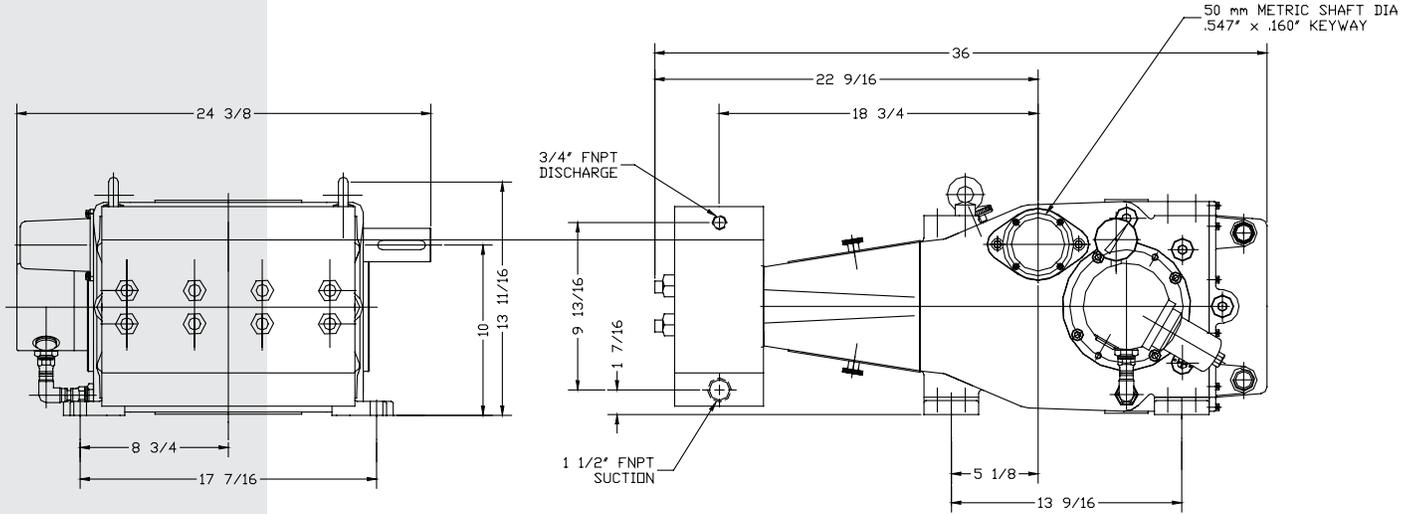

Dimensions

Other Items Available From Hydroplex

- Complete skid or trailer mounted units, standard or custom designed
- High pressure check valves to 30,000 psi
- Pressure regulators, manual or pneumatically operated
- High pressure relief valves to 20,000 psi

Highway 90 East 70508
P.O. Box 3604
Lafayette, LA 70502
Phone: (337) 233-0626
Fax: (337) 233-0828



A product of AGI Industries

**HYDROPLEX**
High Pressure Pump and System Specialists